
TECHNICAL DATA SHEET

STI

SA/CL-2.Azd+BP.3/1

PNEUMATIC POSITIONER

PRODUCT PHOTO

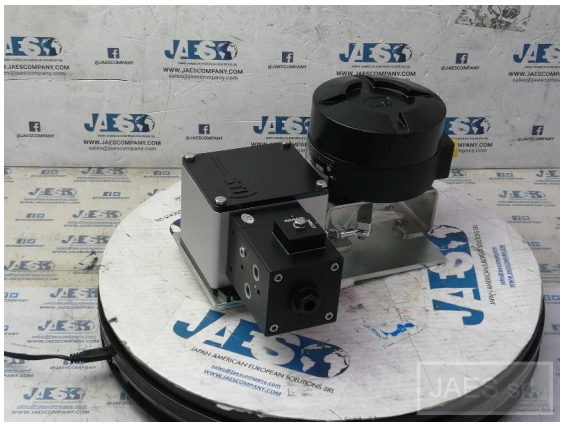

Technical Specifications

Operating pressure (Min)	**2.5 bar**
Operating pressure (Max)	**7 bar**
Design pressure	**10 bar**
Static air consumption	**1.02 Nm 3/h (0.6 SCFM) at 400 kPa (60 psi)**

Connections

Feeding connection	**ND 1/4”**
Output connection	**ND 1/4”**
Pilot signal connection	**1/4” NPTF**

General

Exclosure degree of protection	**IP65**

Performance

CV max Inlet	**0.34**
CV max Outlet	**0.34**
Sensitivity	**0.2% of signal range**
Linearity	**1% of the full stroke**
Hysteresis	**0.5% of the full stroke**

Environmental

Operating temperature	**-20°C / +70°C**

TECHNICAL DATA SHEET

STI

SA/CL-2.Azd+BP.3/1

PNEUMATIC POSITIONER

Control Signal

Signal	**3-15 psi**

Physical

Weight	**2.3 kg**

Request this product

https://jaescompany.com/product.php?productid=152067