
TECHNICAL DATA SHEET

FINDER

55.34.9.024.0040

Relay

PRODUCT PHOTO

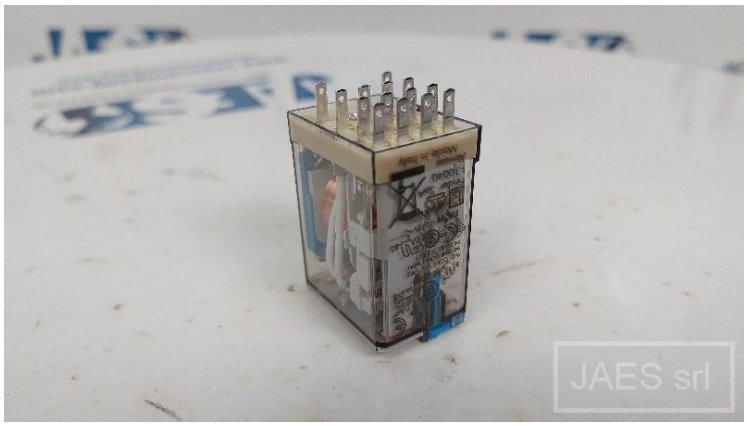

Technical Specifications

Contact Configuration	**4PDT (4 CO)**
Rated Contact Current	**7A**
Rated Switching Voltage DC	**30V**
Contact Material	**Silver Nickel (AgNi)**

Timing

Operate Time	**9ms**

Physical

Mounting Type	**Socket**
Connection Type	**Solder pin**

Dimensions

Net Height	**37.2 mm**
Net Width	**27.7 mm**
Net Depth	**20.7 mm**

Performance

Motor Rating	**0.125 kW single phase (230 VAC)**
Minimum Switching Load	**300 mW**

Insulation

Dielectric Strength between open contacts	**1000 VAC**

TECHNICAL DATA SHEET

FINDER

55.34.9.024.0040

Relay

Insulation (continued)

Rated Impulse Voltage (Uimp)	**4 kV**

Request this product

https://jaescompany.com/product.php?productid=173810