
TECHNICAL DATA SHEET

HASKEL

29723-36

AIR DRIVEN LIQUID PUMPS

PRODUCT PHOTO

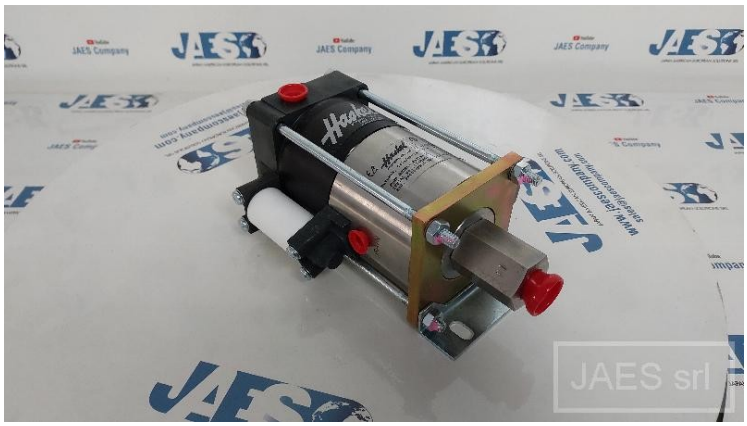

Performance

Power	**0.33 HP**
Actual Ratio	**41**
Displacement (cu)	**0.12**
Displacement (ml)	**2**
Max Rated Continuous Output Pressure (psi)	**4500**
Max cycles	**325/min**
Max outlet pressure (continuous)	**4500 psi**
Max outlet pressure (intermittent)	**4500 psi**
Displacement / cycle	**0.12 cu.in.**
Max flow	**78 cu.in. / min.**

Construction

Air Head	**single**

Operating Conditions

Max Air Pressure	**125 psi**

Connections

Air inlet connection	**1/4″ FNPT**
Liquid inlet connection	**3/8″ FNPT**
Liquid outlet connection	**1/4″ FNPT**

TECHNICAL DATA SHEET

HASKEL

29723-36

AIR DRIVEN LIQUID PUMPS

Materials

Pump section material	**Separation – all SS**
Plunger material	**Hard chrome-plated 15.5PH SS & Dichronite**
Non-metallics material	**UHMWPE, PTFE, Ryton**

Request this product

https://jaescompany.com/product.php?productid=179978