


FLEXIBLOK[®] Lubricators

L14, L22, L32, L42 Series

- Four convenient sizes
- Lubrication to begin at 2 SCFM
- Can be filled under pressure (22, 32 and 42 series)
- Tamper-resistant knob standard
- Polycarbonate bowl standard
- Optional metal bowl (sight glass available on 22, 32 and 42 Series)
- Can be mounted as individual or modular unit

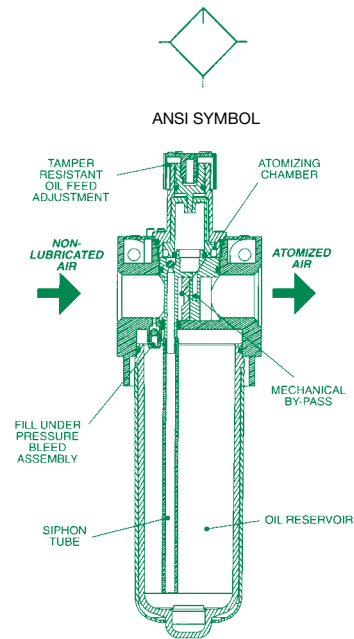

Specifications

	14 Series	22 Series	32 Series	42 Series
Temperature Range °F (°C)	40-120 (4-50)	40-120 (4-50)	40-120 (4-50)	40-120 (4-50)
Max. Pressure PSIG (BAR)	200 (14)	200 (14)	200 (14)	200 (14)
Weight lbs. (kg)	0.60 (0.27)	0.69 (0.31)	1.37 (0.62)	4.15 (2.18)
Body Material	Zinc	Aluminum	Aluminum	Aluminum

How to Order

Lubricators

