

FLEXIBLOK[®]

Particulate Filter/Regulator


P14, P22, P32, P42 Series

- Four convenient sizes
- 5 micron element standard
- Can be installed as individual or modular unit
- Locking non-rising adjustment
- Polycarbonate bowl standard
- Optional metal bowl (sight glass available on 22, 32 and 42 Series)
- Standard output pressure 0-125 PSIG
- Bowl seal held captive (22, 32, and 42 Series)

Specifications

Bowl		14 Series	22 Series	32 Series	42 Series
Temperature Range °F (°C)		40-120 (4-50)	40-120 (4-50)	40-120 (4-50)	40-120 (4-50)
Max. Pressure PSIG (BAR)	Poly C	150 (10)	150 (10)	150 (10)	150 (10)
	Metal	200 (14)	200 (14)	200 (14)	200 (14)
Weight lbs. (kg)	Poly C	0.75 (0.34)	0.91 (0.41)	1.81 (0.82)	5.05 (2.29)
	Metal	0.80 (0.37)	1.50 (0.68)	2.99 (1.34)	6.15 (2.79)
Nominal Flow SCFM (L/M)*		40 (1133)	60 (1699)	90 (2549)	300 (8496)
Body Material		Zinc	Aluminum	Aluminum	Aluminum

*Nominal flow using a 5 micron element, at 100 psig (6.9 bar) inlet pressure and 80 psig (5.5 bar) set pressure

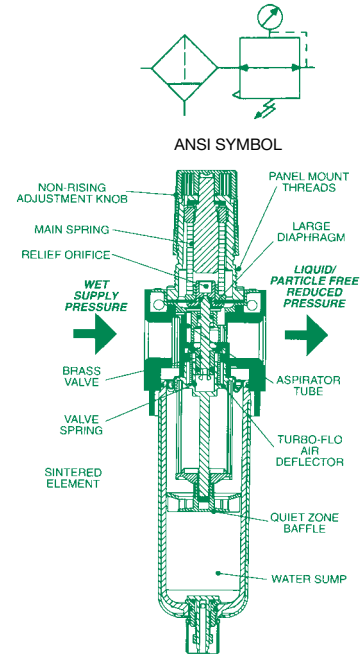

How to Order

Particulate Filter/Regulator

Model _____ **P 22 B - 04 G**

Model _____
P = Particulate Filter/Regulator

Series _____
14 = 1.5 oz. Bowl
22 = 3.8 oz. Bowl
32 = 8.5 oz. Bowl
42 = 8.5 oz. Bowl

Style _____
B = 5 Micron Element

Threads _____
- = NPTF

Options
A = Auto Drain (22, 32, and 42 Series)
G = Gauge
J = External Pulse Drain (14 Series)
M = Metal Bowl with Sight Glass
Q = Metal Manual Drain

Port Size
02 = 1/4 (14 or 22 Series)
03 = 3/8 (22 Series)
04 = 1/2 (22 or 32 Series)
06 = 3/4 (32 Series)
08 = 1 (42 Series)