0

 \bigcirc

Cylinder technical card	
Rod diameter [mm]	56
Stroke [mm]	860
Cushionings	Front and Rear FAST adjustable
Sealing system	NBR + POLYURETHAN
Rod treatment	No treatment
Proximity sensors	Without proximity sensors
Head's configuration	B2E4X2Z4
Position transducer	Without transducer

77

E

31

36

500

<u>G 3/4</u>

56

CH. 48

9

M42x2

Ø <u>56</u>


Ø 72 f9

953

1072

36

<u>G 3/4</u>

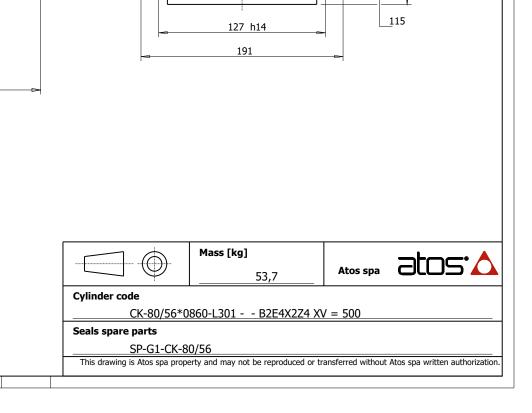

115

TT TT

Ô

 \bigcirc

 \bigcirc

 $| \bigcirc$

<u>Ø</u>40 f8

127

0