

# Five - Valve Manifold, Direct Mounting - T Type

*General*


## Model No. G5 VMPF1

Five Valve Manifold Model “T” type Model G5VMPF1 is designed for direct mounting on differential pressure instruments. The manifold incorporates two process isolation valves, one equalizer valve and two drain/vent valves in a compact block. The process connection is threaded for connections by tube or pipe fittings.

Dimensions shown are for the standard 54 mm or 2 1/8 inch centres for instrument and process connections but are available for other centres on request. Thread details shown are for standard popular sizes and available to suit other thread standards.



## Description

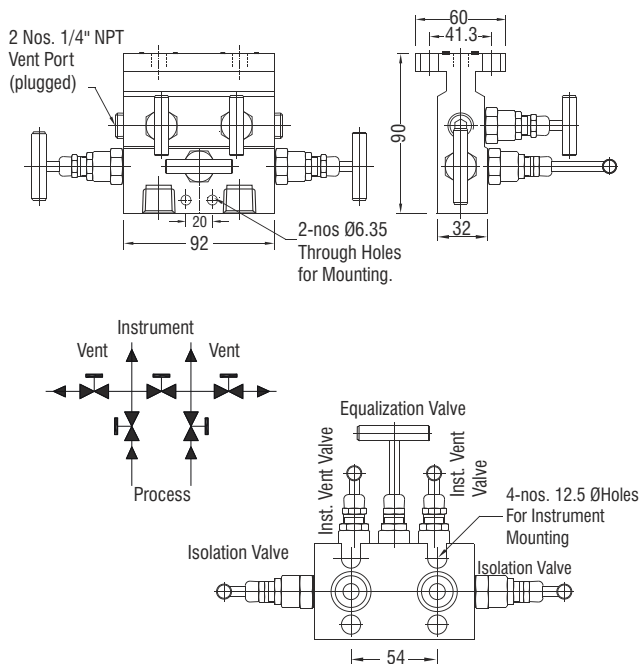

<b>Connections</b>	Process : 1/2"NPT (F) Instrument : Flanged Drain/Vent : 1/4"NPT (F)
<b>Test Pressure</b>	@ 25°C Room Temperature Hydrostatic : Body - 415 bar(g) Seat - 415 bar(g) Pneumatic : Seat - 7 bar(g)
<b>Gland Packing</b>	PTFE : Standard GRAPHOIL : Temperatures above 200°C
<b>Material</b>	A 105, A 182 GR F 304, A 182 GR F 316, Monel, Hastelloy, Duplex
<b>Finish</b>	CS zinc plated. SS Natural
<b>Mounting Kit</b>	Mounting bracket with U bolts and necessary kits for fitting on 2"NB stanchion pipe stand or wall mount. (to be ordered separately)
<b>Option</b>	Test Port on precess side with plug
<b>Accessory</b>	Mounting Bolts - IS : 1364 - 1960 - 4 Nos Interface seal - PTFE / VITON - 2 Nos

**Note:** Also available with BSP and BSP taper threads.

**Note:** Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.