

# Temposonics®

Magnetostrictive Position Sensors

## R-Series SSI

**Temposonics® RP and RH**  
Measuring length 25 - 7600 mm



Perfect data processing  
**1  $\mu$ m**

- Rugged Industrial Sensor
- Linear and Absolute Measurement
- LEDs for Sensor Diagnostics
- Contactless Sensing with Highest Durability
- Superior Accuracy: Resolution up to 1  $\mu$ m
- Linearity better 0,01 %
- Repeatability 0,001 %
- Direct 24/25/26 Bit SSI Output, Gray/Binary
- Synchronous Measurement for Real-time Sensing

## New...a sensor diagnostic display

Integrated LEDs (green/red) provide basic visual feedback for normal sensor operation and troubleshooting.




Green	Red	Description
ON	OFF	Normal function
ON	ON	Magnet not detected
ON	Flashing	Wrong quantity of Magnets
Flashing	ON	Sensor not synchronous*
Flashing	ON	Programming mode

\*for synchronous measurement only


## SSI (Synchronous Serial Interface)

The sensors fulfill all requirements of the SSI standard for absolute encoders. Its displacement value is encoded in a **24/25/26** code format and transmitted at high speed in SSI standard format to the control device. Main feature of SSI is the synchronized data transfer. Synchronization in a closed-loop control system is made simple. A clock pulse train from a controller is used to gate out sensor data: one bit of position data is transmitted to the controller per one clock pulse received by the sensor. The absolute, parallel position data is continually updated by the sensor and converted by the shift-register into serial information.


## Sensor input



## Timing diagram

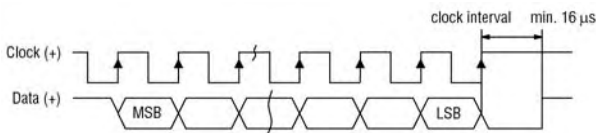

## Logic diagram

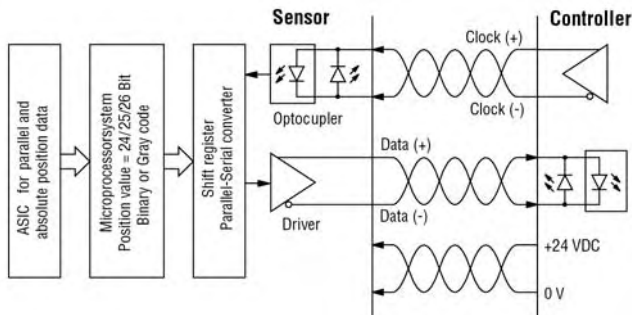

## Sensor field programming


Temposonics® R-Series sensors are preconfigured at the factory by model code designation. If needed, MTS offers an external service tool for modifying sensor parameters inside the active electrical stroke (minimum 25 mm between set-points) via the standard connection cable. There is no need to open the sensors electronics.

## PC-Programmer R-SSI

This hardware converter is required to communicate via serial port of Windows PC to the sensor. Customized settings are possible by using a MTS programming software (CD-ROM) for:

- Data length
- Data format
- Resolution
- Measuring direction
- Synchronous / asynchronous measurement
- Offset, begin of the measurement range
- Alarm value (Magnet outside)
- Measurement filter
- Differential measurement: Distance between two magnets
- Speed measurement instead of position


Test sensor function permits a fast control of installed sensor. Its position values are shown in a diagram.

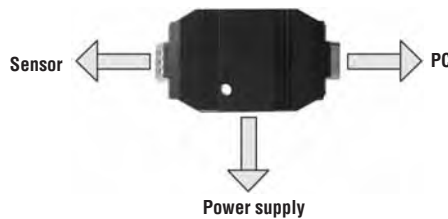

## Programming-Kit, Part No. 253 135

(PC-Programmer, Power supply, Cable, Software)

## Windows sensor programming

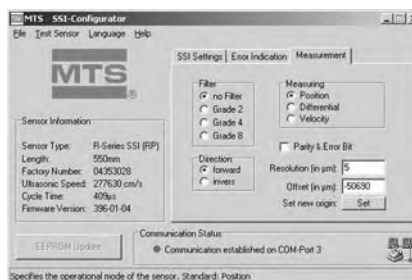

## Technical Data

### Input

Measured variable	Displacement, Displacement difference between 2 magnets, Velocity
Measuring range	Profile 25 - 5000 mm / Rod 25 - 7600 mm

### Output

Interface	SSI (Synchronous Serial Interface) - Differential signal in SSI standard					
Data format	Binary or Gray, optional Parity and Errorbit					
Data length	8 ... 32 bit					
Update time	Measuring length	300	750	1000	2000	5000 mm
	Measurements/sec.	3,7	3,0	2,3	1,2	0,5 kHz
Data speed	70 kBaud ... 1 MBaud, depending on cable length:					
	Length	<3	<50	<100	<200	<400 m
	Baud rate	1,0 MBd	<400 kBd	<300 kBd	<200 kBd	<100 kBd
Overvoltage protection	up to 36 VDC					

### Accuracy

Resolution	Displacement: 1 µm, 2 µm, 5 µm, 10 µm i.a. / Velocity above 10 measured values: 1 µm/s, 2 µm/s, 5 µm s...
Linearity	< ± 0,01 % F.S. (minimum ± 40 µm) Option intern linearisation Linearity tolerance: Model RP-G ±6 ... ±40 µm = 100 mm ... 5000 mm ML RH ±10 ... ±70 µm = 100 mm ... 5000 mm ML
Repeatability	< ± 0,001 % F.S. (minimum ± 2,5 µm)
Temperature coefficient	< 15 ppm/°C
Hysteresis	< 4 µm typical 2 µm

### Operating conditions

Magnet speed	Any
Operating temperature	-40° C ... +75° C
Dew point, humidity	90% rel. humidity, no condensation
Protection	Profile: IP65, Rod: IP67, IP68 for cable outlet
Shock test	100 g, single hit, IEC-Standard 68-2-27
Vibration test	15g / 10 - 2000 Hz, IEC-Standard 68-2-6 Option: Vibration resistant 30 g av
Standards, EMC test	Electromagnetic emission EN 50081-1
	Electromagnetic immunity EN 50082-2
	EN 61000-4-2/3/4/6, Level 3/4, Criterium A, CE-qualified

### Form factor, material





Diagnostic display	LEDs beside connector
Profile model:	
Sensor head	Aluminum
Sensor stroke	Aluminum
Position magnet	Magnet slider or removable U-magnet
Rod model:	
Sensor head	Aluminum
Rod with flange	Stainless steel 1.4301 / AISI 304
-Pressure rating	350 bar, 700 bar peak <b>option:</b> 800 bar, 1200 bar peak
Position magnet	Ring magnets, U-magnets
- Differentiation measurement	Min. Magnetdistance 50 mm (in the range of 50 - 75 mm double Linearity)

### Installation


Mounting position	Any orientation
Profile	Movable mounting clamps or T-slot nuts M5 in base channel
U-Magnet, removable	Mounting plate and screws from antimagnetical material
Rod	Threaded flange M18 x 1,5 or 3/4" -16 UNF-3A
Position magnet	Mounting plate and screws from antimagnetical material

### Electrical connection


Connection type	7 pin connector M16 or cable outlet
Input voltage	24 VDC (-15 / +20 %)
- Polarity protection	up to -30 VDC
- Overvoltage protection	up to 36 VDC
Current drain	100 mA typical
Ripple	< 1 % S-S
Electric strength	500 V (DC ground to machine ground)

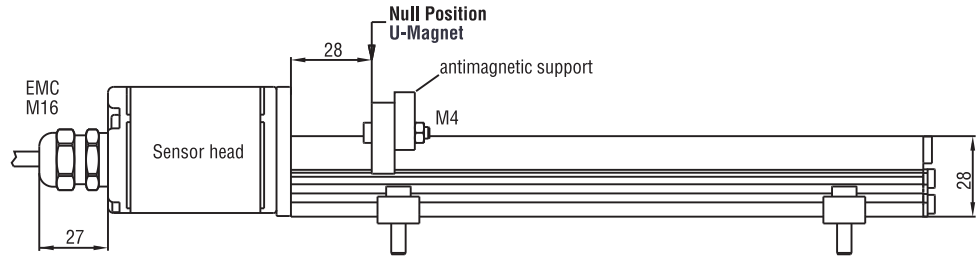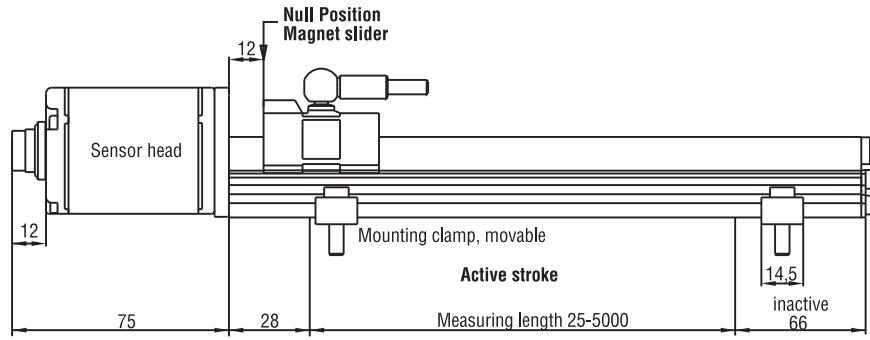


### Selection of position magnets (upon delivery)




Magnet slider S  
Part No. 252 182




GFK, Magnet Hardferrite  
Ball joint CuZn39Pb3 nickel plated  
Weigth ca. 30 g  
Operating temperature:  
-40 ... +75°C




Magnet slider V  
Part No. 252 184



GFK, Magnet Hardferrite  
Ball joint CuZn39Pb3 nickel plated  
Weigth ca. 30 g  
Operating temperature:  
-40 ... +75°C



U-Magnet M OD33  
Part No. 251 416-2



PA-Ferrit-GF20  
Weigth ca. 11g  
Operating temperature: -40 ... +100°C  
Surface pressure max. 40 N/mm<sup>2</sup>  
Fastening torque for M4 screws max. 1 Nm

### Stable Profile Design

Temposonics®-RP offers modular construction, flexible mounting configurations and easy installation. Position measurement is contactless via two versions of permanent magnets.

- A sliding magnet running in profile housing rails. Connection with the mobile machine part is via a ball jointed arm to taking up axial forces.
- A floating magnet, mounted directly on the moving machine part, travels over the profile at a low distance. Its air-gap allows the correction of small misalignments at installation.

Wiring	Pin	Cable	Function
<p>Male insert sensor plug rear of cable connector</p>	1	grey	Data (-)
	2	pink	Data (+)
	3	yellow	Clock (+)
	4	green	Clock (-)
	5	brown	+24 VDC
	6	white	0 V (GND)
	7	do not connect	

### Connection types

#### 1. Connector outlet D70



7 pin male receptacle M16

#### 2. Cable outlet P02


2 m PUR cable 7 x 0,14 mm<sup>2</sup>

Cable-Ø 7 mm

EMC shielded, 50 mm bending radius at fixed installation

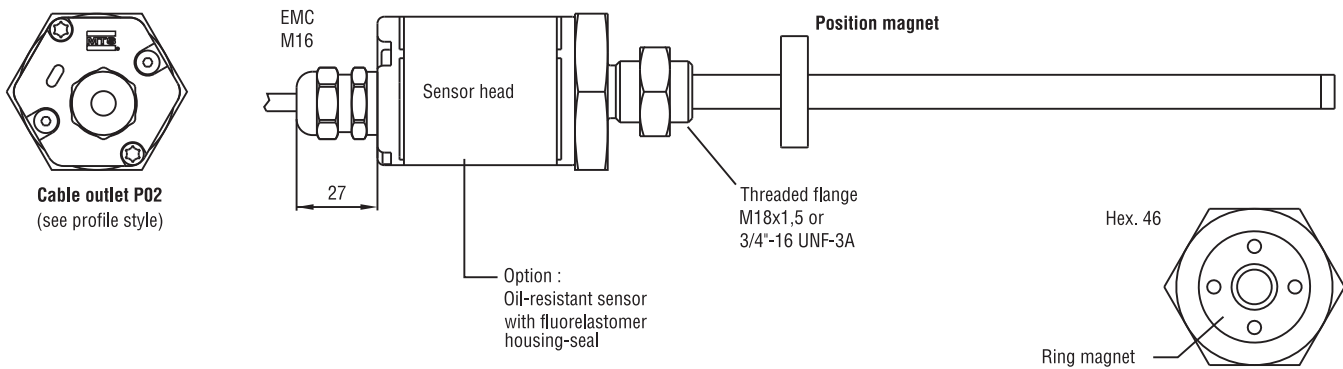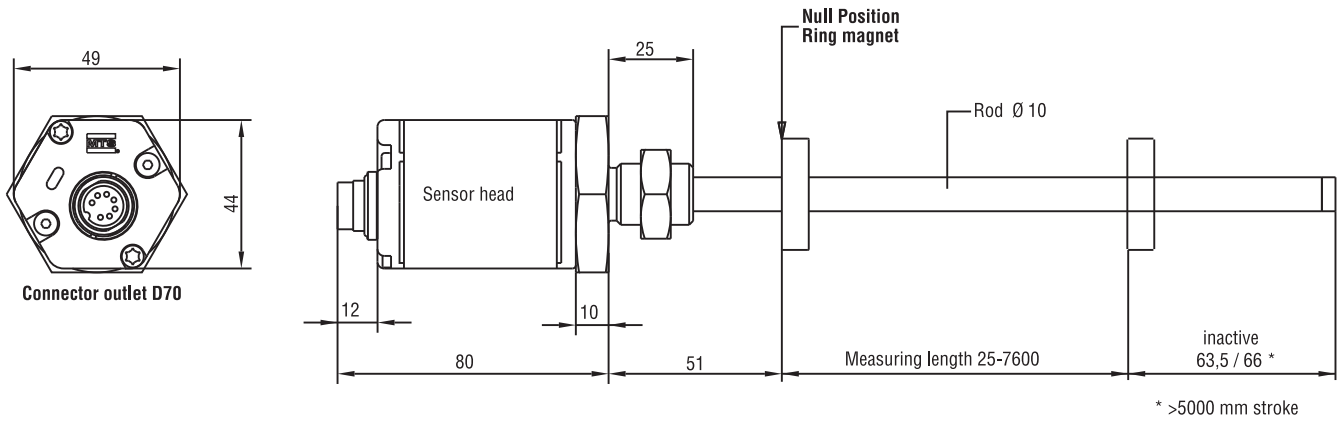


## Selection of position magnets (not on delivery)




**Ring magnet OD33**  
**Part No. 201 542-2**

Composite PA-Ferrite-GF20  
Weigh ca. 14g  
Operating temperature:  
-40 ... +100°C  
Surface pressure max. 40 N/mm<sup>2</sup>  
Fastening Torque for M4 screws max. 1 Nm



**U-Magnet M OD33**  
**Part No. 251 416-2**

PA-Ferrit-GF20  
Weigh ca. 11g  
Operating temperature: -40 ... +100°C  
Surface pressure max. 40 N/mm<sup>2</sup>  
Fastening torque for M4 screws max. 1 Nm



**Ring magnet OD25,4**  
**Part No. 400 533**

Composite: PA-Ferrite  
Weigh ca. 10g  
Operating temperature:  
-40 ... +100°C  
Surface pressure max. 40 N/mm<sup>2</sup>

## High Pressure Rod Design

Temposonics®-RH with a pressure-resistant stainless steel flange and sensing rod is suitable for use in hydraulic cylinders and externally in all applications where space is a problem. Position measurement is via ring or U-magnets travelling along the sensing rod without any mechanical contact.

### Advantage...

the completely operable sensor cartridge can be replaced for servicing easily without opening the fluid circuit.

## MOUNTING / INSTALLATION

### Flexible installation in any position

#### Profile model


Normally, the sensor is firmly installed - fixed on a straight surface of the machine with movable mounting clamps or M5 screws in base channel - whilst the magnet is mounted at the mobile machine part.

#### Rod model

Mount the sensor via flange thread or a hex nut. If possible, non-magnetizable material should be used for mounting support (dimensions as shown). With horizontal mounting, longer sensors (from 1 meter) must be provided with mechanical support.


#### Hydraulic sealing

Recommended is sealing of the flange facing with O-Ring (e.g. 22,4 x 2,65) in a cylinder cover nut or an O-Ring 15,3 x 2,2 in undercut.


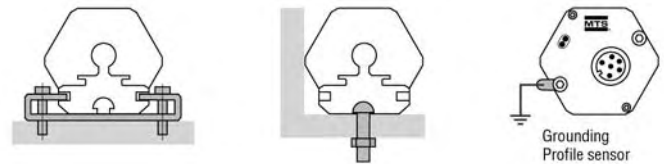


### Minimum assembly distance

#### 1. Non-magnetizable material



#### 2. Magnetizable material

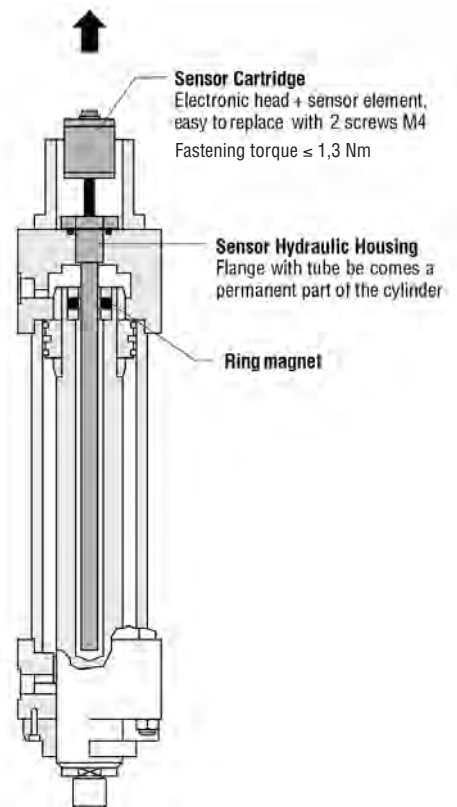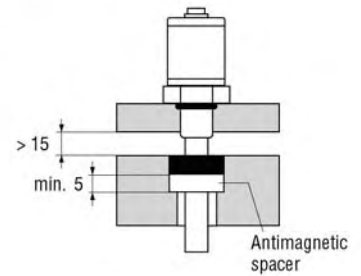

### Cylinder installation

When used for direct stroke measurement in fluid cylinders, the sensor's high pressure, stainless steel rod installs into a bore in the piston head/rod assembly as illustrated. That guarantees a longlife and trouble-free operation - independent of used hydraulic fluid.

The sensor cartridge can be removed from the flange and rod housing while still installed in the cylinder. This procedure allows quick and easy sensor cartridge replacement, without the loss of hydraulic pressure.



## Temposonics®

### Sensor model

RP - Profile

RH - Rod

### Form factor

#### Profile Temposonics®-RP:

**S** - Magnet slider, joint at top

**V** - Magnet slider, joint at front

**G** - Magnet slider, joint at top, backlash free

**M** - U-Magnet, OD33

#### Rod Temposonics®-RH:

**M** - Flange M18 x 1,5 (Standard)

**V** - Flange M18 x 1,5 (Fluorelastomer housing-seal)

**S** - Flange 3/4" - 16 UNF - 3A

**J** - Flange M22 x 1,5, rod Ø 12,7 mm, 800 bar

### Measuring length

**Profile** - 0025...5000 mm

**Rod** - 0025...7600 mm

Standard: up to 1000 in 50 mm, greater 1000 in 250 mm steps

Other length upon request

### Connection type

**D70** - 7 pin male receptacle M16

**P02** - 2 m PUR-cable w/o connector, option: P01-P10 (1-10 m)

### Input voltage / Conditions of use

**1** - +24 VDC

**A** - +24 VDC / vibration resistant (measuring length 25 ... 2000 mm)

### Output

**S [1][2][3][4][5][6]** = Synchronous Serial Interface

**[1]** Data length: **1** - 25 Bit • **2** - 24 Bit • **3** - 26 Bit

**[2]** Output format: **B** - Binary • **G** - Gray

**[3]** Resolution (mm): **1** - 0,005 • **2** - 0,01 • **3** - 0,05 • **4** - 0,1 • **5** - 0,02 • **6** - 0,002 mm • **8** - 0,001 mm

**[4]** Performance: **1** - Standard

**[5][6]** Options: **00** - Measuring direction forward

**01** - Measuring direction reverse

**02** - Measuring direction forward, synchronized measurement

**05** - Measuring direction forward, Bit 25 = Alarm, Bit 26 = Parity even, select data length 26 Bit

**11** - Measuring direction forward, synchronized measurement and prediction 0,2 - 10 khz

**12** - Differential measurement

**13** - Velocity asynchron

**16** - Measuring direction forward, internal linearization

**19** - Measuring direction forward, internal linearization, synchronized measurement

### On delivery profile model:

Sensor, Position magnet, 2 mounting clamps up to 1250 mm + 1 clamp for every additional 500 mm.

### On delivery Rod model:

Sensor and hex nut. Order magnet (see below) separately.