


Wattsud

Type IWR 30K

INDEX

VERSIONE ITALIANA

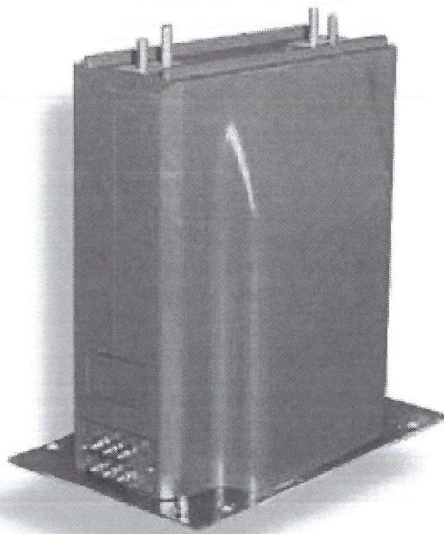


Rated primary current up to 2500 A
Rated secondary current 5 or 1 A
Rated short-time thermal current 100I_{pn} x 1 sec. (MAX 50kA x 1 sec.)
Multiratio obtained by secondary reconnection
Frequency 50 or 60 Hz
Different characteristics upon agreement
CT according to CEI and IEC Standards; also to VDE-BS-ANSI Standards on request
BIL: 36/70/170 kV

Drawing A007


Issued
05/1999

ESECUZIONE SPECIALE PER LIVELLO DI ISOLAMENTO 36 / 85 / 200 kV
SPECIAL EXECUTION FOR BIL 36 / 85 / 200 kV

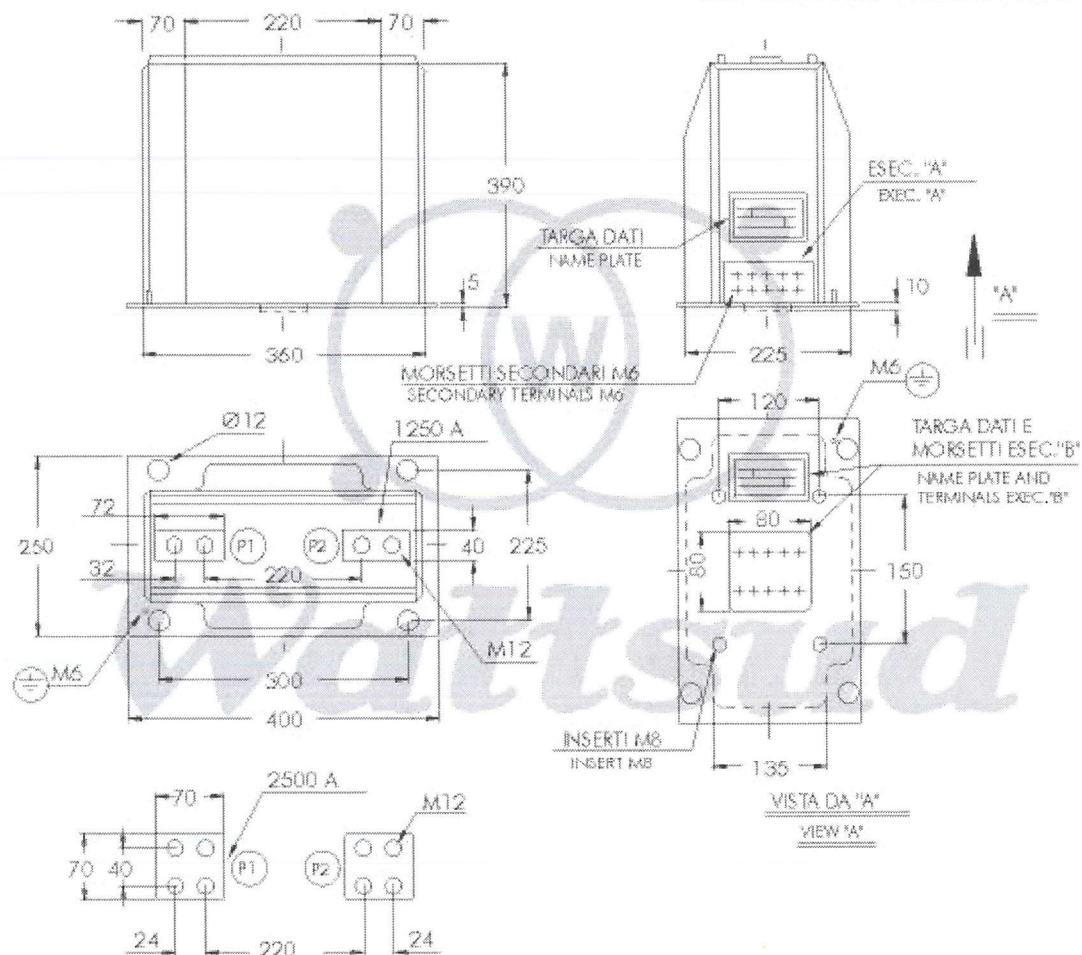

TOP OF PAGE

INDEX

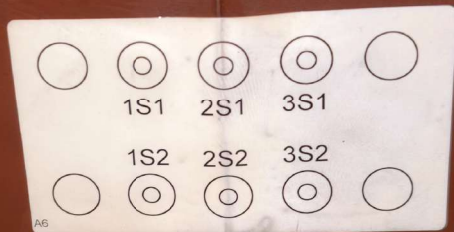

WATTSUD S.p.A.		CURRENT TRANSFORMER				IEC 60044-1	
CASAVATORE (NA)							
TYPE	IWR30K	Nr.	0832000113	60	Hz		
STC	31.5kAx15	78.75	kA	kV	36/70/170		
RATIO	600 / 5		/ 5		/ 5		
VA/cl	10/0.5Fa10	10/5P10	20/0.5Fa10				
Terminals	1S1-1S2	2S1-2S2	3S1-3S2				
CL. B							



OPPO Find X8 Pro
31mm f/1.6 1/100s ISO640 | 2026年7月13日 14:22